

Shin-Etsu Silicones

SEALANT-AA

Silicone Sealant for General Uses


Characteristics :

- Easy handling and fast curing at room temperature
- Good adhesiveness on glass, metals, prefab housing units, suspension construction units and various material surfaces
- High heat and cold weather resistance in the range of -50 to 150°C
- Non-flow able features when applying both vertical and horizontal joints designed
- Good chemical resistance & superior durability

Properties :

Items	Results	Test Method
Appearance	Paste	-
Hardness Shore A	21	JIS-K-6249
Tensile Strength	1.9 MPa	JIS-K-6249
Elongation at break	600%	JIS-K-6249
Tact Free Time @ 23c	7 min.	JIS-K-6249
Curing condition	Room Temperature	-

* Curing conditions : 23±2 degree Celsius, 50±5 %Room Humidity, 7 days

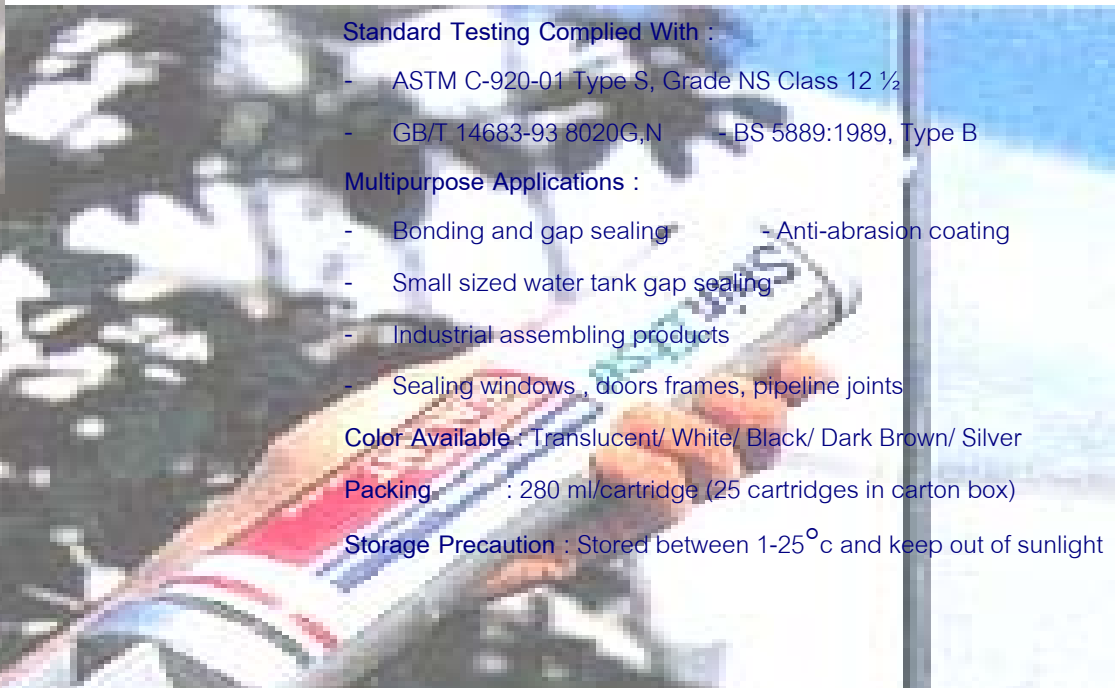

Standard Testing Complied With :

- ASTM C-920-01 Type S, Grade NS Class 12 ½
- GB/T 14683-93 8020G,N
- BS 5889:1989, Type B

Multipurpose Applications :

- Bonding and gap sealing
- Small sized water tank gap sealing
- Industrial assembling products
- Sealing windows , doors frames, pipeline joints
- Anti-abrasion coating

Color Available : Translucent/ White/ Black/ Dark Brown/ Silver

Packing : 280 ml/cartridge (25 cartridges in carton box)

Storage Precaution : Stored between 1-25°C and keep out of sunlight