




# Accessory

## Specification

### Adjust

ITEM	DESCRIPTION
Height (mm.)	600±100, 800±100, 1000±100
Structure	Material: SS400 (Zinc coated, Color) SUS
	Size: PL-3Thk : [-40x75x7x5Thk.

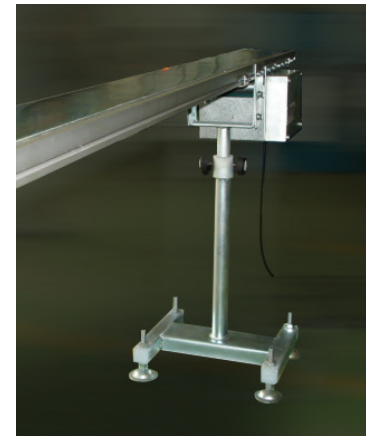

### FIX

ITEM	DESCRIPTION
Height (mm.)	750±50, 850±50, 950±50
Structure	Material: SS400 (Zinc coated, Color) SUS, Aluminum : [-36.5x36.5 (Aluminum only) : [-38x38x1.6Thk. : [-50x50x2.3Thk. : [-40x75x7x5Thk.




### Caster

Material	Polyurethane, Nylon, Rubber
Diameter	50 mm, 75 mm, 100 mm

### Foot type table

Foot type	Size (mm)	Material	Load capacity Kgs./Pc.
Adjust base (A)	M-12	SS, SUS	30
	M-16	SS, SUS	50
Caster (C)	50	Rubber	30
		Nylon	40
		Polyurethane	40
	75	Rubber	40
		Nylon	50
		Polyurethane	55
	100	Rubber	120
		Nylon	140
		Polyurethane	140

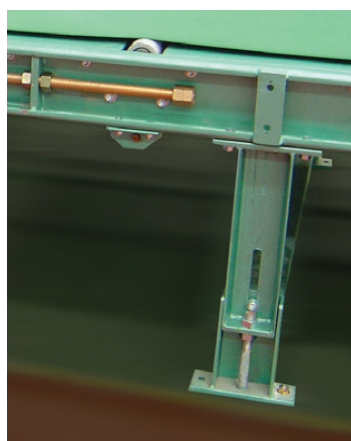

**Note:** Foot type selection are depending upon load capacity and working condition. (refer to table 1.3)

**Example:** Fixed position on mobile type. Fixed on adjustable in height.